



# Top-mount Apron Front Kitchen Sink K-3942-3

#### **Features**

- 36-inch minimum base cabinet width.
- Single bowl.
- 9-inch depth.
- Self-Trimming apron overlaps the cabinet face for easy installation.
- Apron height allows sink to be used in most standard cabinetry or retrofitted to existing standard cabinetry.
- Three faucet holes.
- Rear drain increases workspace in the sink and storage space underneath.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes installation hardware and compatibility template.

#### Materia

Handcrafted from 18-gauge stainless steel.

### Installation

Top-mount apron-front.

## **Recommended Products/Accessories**

K-6474 Sink Rack

K-6377 Sponge Caddy

K-6378 Kitchen Brush Caddy

K-6379 Kitchen Squeegee

K-6382 Disinfecting Wipes Dispenser

K-6383 Soap Dispenser

K-8618 Paper Towel Holder

K-8619 Flexible Kitchen Mat

K-8801 Sink Strainer

K-8799 Sink Strainer

K-8624 Dish Scraper

## **Optional Products/Accessories**

K-6429 Utility Rack

## **Included Components**

Product consists of:

1130570 Hardware Kit, Self-Rimming 1173293 Hardware Kit, Side Clip

## Codes/Standards ASME A112.19.3/CSA B45.4


# Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks

See website for detailed warranty information.







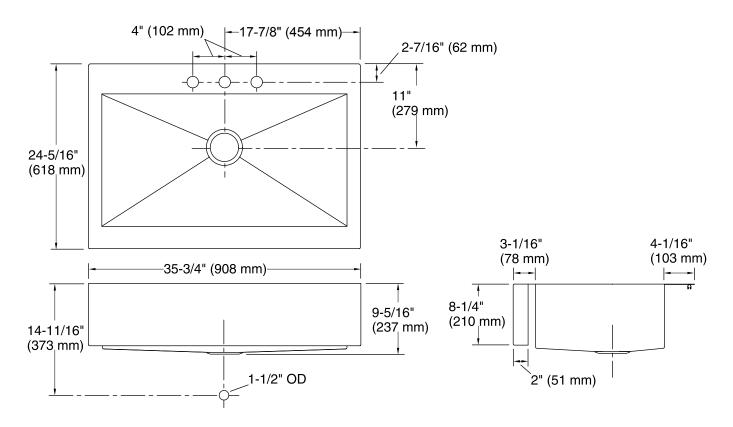

### **Technical Information**

All product dimensions are nominal.

Bowl configuration: Single
Installation: Top-mount
Min. base cabinet 36" (914 mm)

width:

Bowl area (Only): Length: 32-1/2" (826 mm)

Width: 17-3/16" (437 mm) Bowl depth: 9" (229 mm)

Number of deck holes: 3

Faucet hole(s): 1-7/16" (37 mm)
Drain hole: 3-5/8" (92 mm)

Template: 1166717-7, required, included

1178341, required, included

#### **Notes**

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

IMPORTANT! The distance from the top edge of the cabinet to the top of the cabinet door must be at least 8-3/8" (213 mm) to install this sink.

