

Kallan® Widespread bathroom sink faucet K-R24056-4DL

Features

- Two-handle widespread faucet for 8" 16" (203 406 mm) centers
- Two lever handles offer separate control of hot and cold water
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate
- Coordinates with other products in the Kallan[™] collection
- Box includes: Assembled faucet, handles, supply lines, clicker drain, mounting hardware, installation instructions

Material

- Premium material construction for durability and reliability
- Select KOHLER finishes feature ScratchShield[®] technology which withstands even the toughest daily use
- Spot Repel[™] finish resists fingerprints, smudges, and water spots (Oil-Rubbed Bronze finish only)

Installation


- Widespread
- Simplified faucet installation; mounting hardware requires no special tools
- Handles preassembled on valves and quick-connect fittings simplify installation

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner

Included Components

Additional Components: Supply Lines (Qty 2)





Codes/Standards ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

BN Vibrant® Brushed Nickel



KOHLER, Faucets

Kallan® Widespread bathroom sink faucet K-R24056-4DL

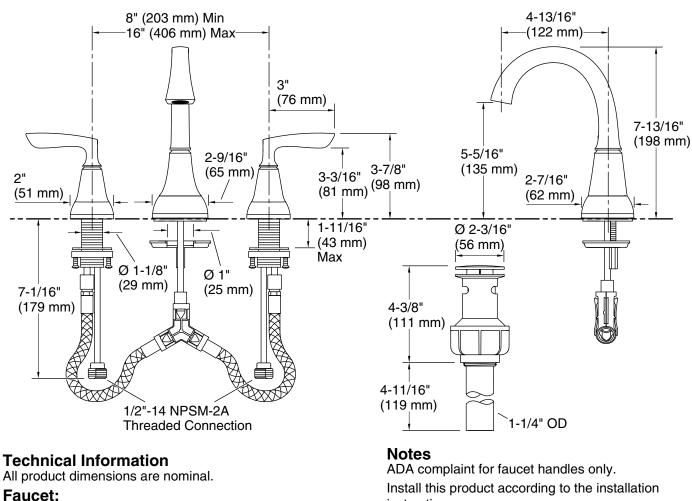

Flow rate:

1.2 gal/min (4.5 l/min) Pressure: 60 psi (4.1 bar)

Yes

Drain included:

Spout:

Spout reach:

4-13/16" (122 mm)

instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

